

Spezifikationen

ANTRIEB

Kette	Shimano Deore, 10-speed
Kurbel	FSA Bosch E-Bike, 38T
Kassette	Shimano HG500, 11-42, 10-speed
Schaltwerk	Shimano Deore M4100
Schalthebel	Shimano Deore M4100, 10-speed

RAHMENSET

Gabel	HeadShok DL50, 50mm, Isolated Damper Technology, OPI, 15x100 thru-axle
Rahmen	Mavaro Neo Si SmartForm C1 Alloy step-thru frame, removable downtube battery, fully internal cable routing, 135x9mm sliding dropout, post mount disc, headtube waterbottle mounts, integrated daytime running light, HDT child seat/cargo mount compatible
Steuersatz	Cannondale HeadShok

LAUFRÄDER

Vorderradnabe	Shimano MT400, 15x100mm thru-axle
Hinterradnabe	Shimano FH-TX505
Felgen	Cannondale 2, Double wall
Speichen	DT Swiss Champion
Reifengröße	2
Reifen	Schwalbe Big Ben, 28 x 2.00" (50-622), GreenGuard puncture protection, reflective sidewalls
Reifendimension	700c

BREMSEN

Bremshebel	Shimano MT200 hydraulic disc
Bremsen	Shimano MT200 hydraulic disc, 180/160mm RT30 rotors

KOMPONENTEN

Griffe	Cannondale Ergo Performance, Lock-On
Lenker	Cannondale E-Series Alloy, ergo backsweep, 680mm
Sattel	Selle Royal Wave
Sattelstütze	Cannondale 4, 6061 Alloy, 31.6, 300 (SM), 350mm (MD), 400mm (XL)
Vorbau	Cannondale 1 Adjustable Si Stem w/ Integrated Cable Routing and SP-connect Mount

E-SYSTEM


Motor	Bosch Performance Line CX 250W
Batterie	Bosch PowerTube 625Wh
Ladegerät	Bosch 4A
Display	Bosch Purion

EXTRA

Extra 1	Axa Compactline 35E front light, Axa Blueline rear light, Tubus rear rack, Wingee fenders, ABUS Pro Shield frame lock, Racktime compatible, HT mount
----------------	--

BITTE BEACHTEN, DASS ES AUFGRUND VON VERFÜGBARKEITEN SOWIE ANDEREN FAKTOREN ZU VORAB NICHT ANGEKÜNDIGTEN ÄNDERUNGEN KOMMEN KANN .

Geometry

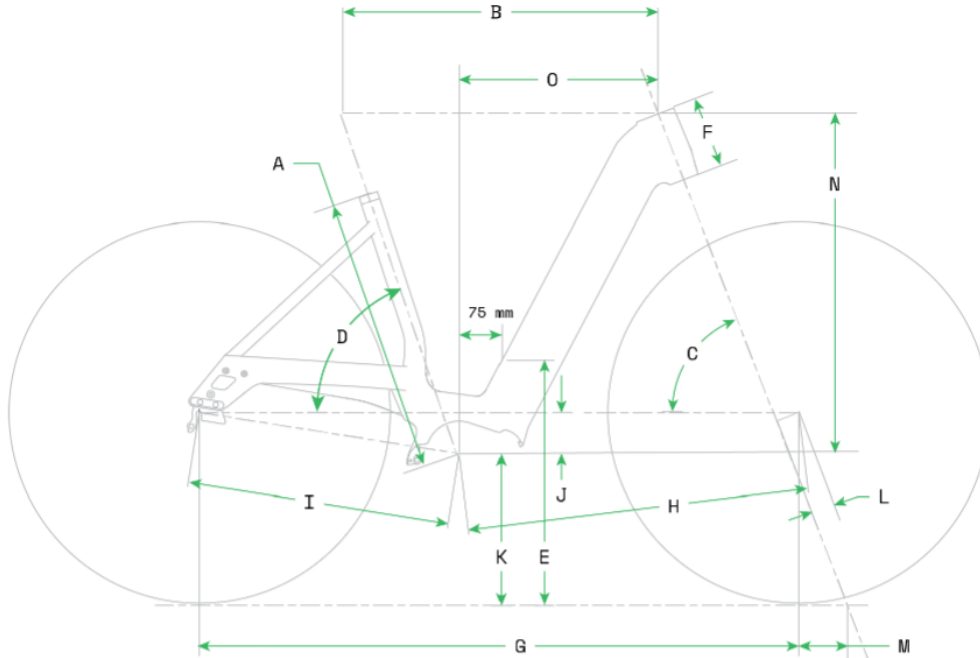

Mavaro Neo

	SM	MD	LG
A Seat Tube Length (cm)	44	52	58
B Top Tube Horizontal (cm)	58	60.5	63.8
C Head Tube Angle	69°	69°	69°
D Seat Tube Angle Effective	72°	72°	72°
E Standover (cm)	40	40	40
F Head Tube Length (cm)	13.4	13.4	16
G Wheelbase (cm)	111.8	114.3	117.7
H Front Center (cm)	64.1	66.6	70
I Chain Stay Length (cm)	48.8	48.8	48.8
J Bottom Bracket Drop (cm)	7.9	7.9	7.9
K Bottom Bracket Height (cm)	28.4	28.4	28.4
L Fork Rake (cm)	4.5	4.5	4.5
M Trail (cm)	9.1	9.1	9.1
N Stack (cm)	64.7	64.7	67.2
O Reach (cm)	37	39.5	42