

# Spezifikationen

## ANTRIEB

<b>Kette</b>	Shimano HG601, 11-speed
<b>Kurbel</b>	FSA Bosch E-Bike w/ custom Ai offset, 38T
<b>Kassette</b>	Shimano Deore 5100, 11-51, 11-speed
<b>Schaltwerk</b>	Shimano Deore M5100
<b>Schalthebel</b>	Shimano Deore M5100, 11-speed

## RAHMENSET

<b>Gabel</b>	SR Suntour XCM 34 Boost, 100mm, 15x110, Coil, 51mm offset
<b>Rahmen</b>	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148x12mm thru-axle, post mount disc, integrated speed sensor, KickFlip hidden kickstand mount, motor protection, rack/fendor mount, lock mount
<b>Steuersatz</b>	Integrated Sealed Bearing, Tapered

## LAUFRÄDER

<b>Vorderradnabe</b>	Shimano MT400, 15x110mm thru-axle
<b>Hinterradnabe</b>	Shimano MT400 12x148mm thru-axle
<b>Felgen</b>	WTB STX i30 TCS, 32h, tubeless ready
<b>Speichen</b>	DT Swiss Champion
<b>Reifengröße</b>	2.25
<b>Reifen</b>	Schwalbe G-One Allround Performance, 29 x 2.25", RaceGuard, tubeless ready
<b>Reifendimension</b>	29

## BREMSEN

<b>Bremshebel</b>	Shimano MT200 hydraulic disc
<b>Bremsen</b>	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors

## KOMPONENTEN

<b>Griffe</b>	Cannondale Ergo Fitness Dual Density, Lock-On
<b>Lenker</b>	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
<b>Sattel</b>	Cannondale Ergo Touring
<b>Sattelstütze</b>	Suspension Seatpost, 31.6
<b>Vorbau</b>	Cannondale Adjustable, A-headset, 31.8mm

## E-SYSTEM

<b>Motor</b>	Bosch Performance Line CX 250W
<b>Batterie</b>	Bosch PowerTube 625Wh
<b>Ladegerät</b>	Bosch 4A
<b>Display</b>	Bosch Purion


## EXTRA

<b>Extra 1</b>	Herrmans H-Black MR4 front light, H-Trace Micro rear light, Tubus Wingee fender, Tubus rear rack (25kg max capacity)
----------------	--

BITTE BEACHTEN, DASS ES AUFGRUND VON VERFÜGBARKEITEN SOWIE ANDEREN FAKTOREN ZU VORAB NICHT ANGEKÜNDIGTEN ÄNDERUNGEN KOMMEN KANN .

<b>F Standover (cm)</b>	74.5	74.6	75.3	75.1
<b>G Head Tube Length (cm)</b>	12.0	12.0	13.0	14.0
<b>H Wheelbase (cm)</b>	116.7	118.2	121.7	125.0
<b>I Front Center (cm)</b>	70.5	72.0	75.4	78.8
<b>J Chain Stay Length (cm)</b>	47.0	47.0	47.0	47.0
<b>K Bottom Bracket Drop (cm)</b>	6.6	6.6	6.6	6.6
<b>L Bottom Bracket Height (cm)</b>	30.9	30.9	30.9	30.9
<b>M Fork Rake (cm)</b>	5.5	5.5	5.5	5.5
<b>N Trail (cm)</b>	9.9	9.9	9.9	9.9
<b>O Stack (cm)</b>	62.4	62.4	63.3	64.2
<b>P Reach (cm)</b>	40.5	42.0	45.0	48.0

# Geometry

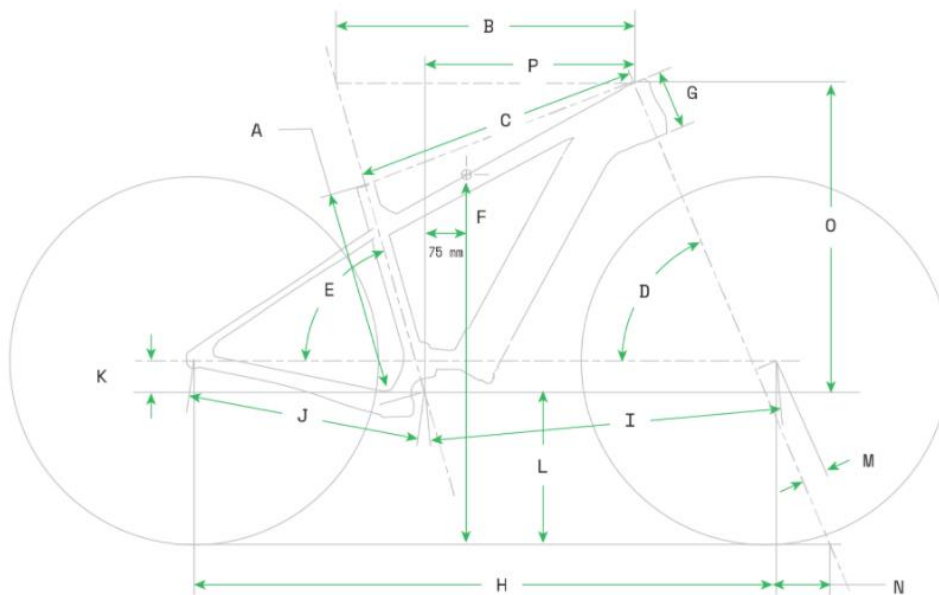

## Tesoro Neo X, C1 Alloy, 625Wh compatible

	S	M	L	XL
A Seat Tube Length (cm)	40.0	43.5	47.0	50.0
B Top Tube Horizontal (cm)	58.4	59.9	63.2	66.5
C Top Tube Actual (cm)	56.9	57.8	60.8	63.9
D Head Tube Angle	67.0°	67.0°	67.0°	67.0°
E Seat Tube Angle	74.0°	74.0°	74.0°	74.0°
F Standover (cm)	74.5	74.6	75.3	75.1
G Head Tube Length (cm)	12.0	12.0	13.0	14.0
H Wheelbase (cm)	116.7	118.2	121.7	125.0
I Front Center (cm)	70.5	72.0	75.4	78.8
J Chain Stay Length (cm)	47.0	47.0	47.0	47.0
K Bottom Bracket Drop (cm)	6.6	6.6	6.6	6.6
L Bottom Bracket Height (cm)	30.9	30.9	30.9	30.9
M Fork Rake (cm)	5.5	5.5	5.5	5.5
N Trail (cm)	9.9	9.9	9.9	9.9
O Stack (cm)	62.4	62.4	63.3	64.2
P Reach (cm)	40.5	42.0	45.0	48.0